

# BL38350(烧结强磁/Sintered NdFeB)

OUTPUT: APPROX 10W~80W

OUTER ROTOR

WEIGHT : 150g (APPROX)




### Typical Application 典型应用

- 个人护理(Personal Care)
- 家用电器(Home Application)
- 电动工具(Industry Apparatus)
- 筋膜枪(Massage Gun)
- 医疗器械(Medical Apparatus)

### Connector Interface 连接端口

NO.	PIN ARRANGEMENT
1	VCC
2	FG
3	CW/CCW
4	GND
5	PWM

### External Dimensions 外形图

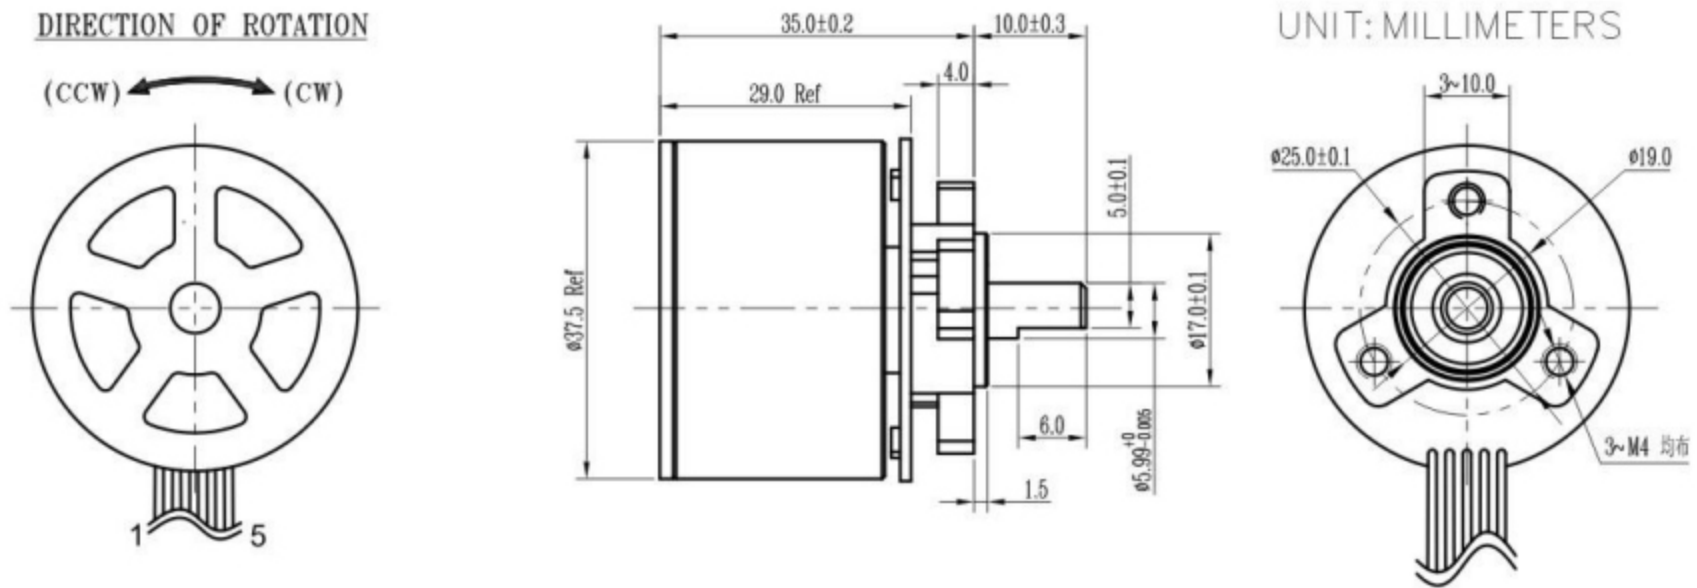


### Major Characteristic Parameters 主要特性参数

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL	
	OPERATING RANGE	RATED	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT
			r/min	A	r/min	A	g.cm	W	g.cm	A
BL38350-V1	8V~15V	12 V	4200	0.39	3790	2.7	720	32	6108	19.2
BL38350-V2	8V~26V	16.8 V	4400	0.31	3810	1.9	810	52	6982	12.4
BL38350-V3	8V~26V	24 V	4460	0.39	3852	1.3	892	65	7250	10.2

### Performance Curves 性能曲线

BL38350-V1 12 V

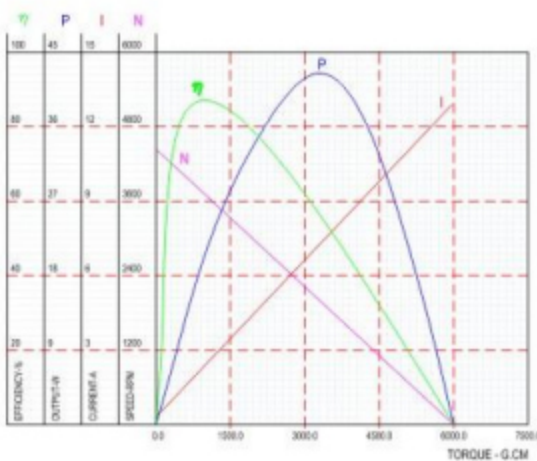

BL38350-V3 24 V

